
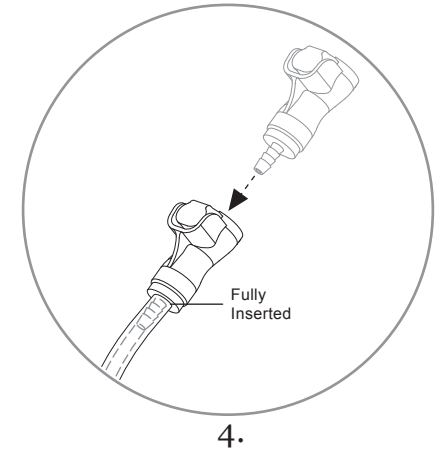
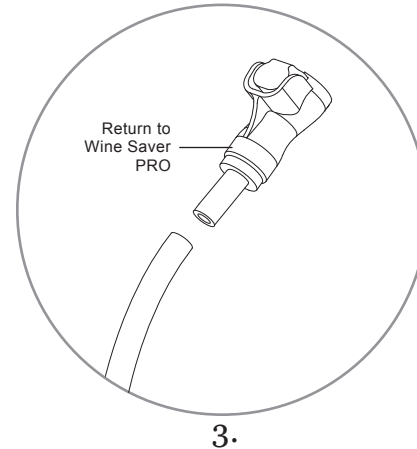
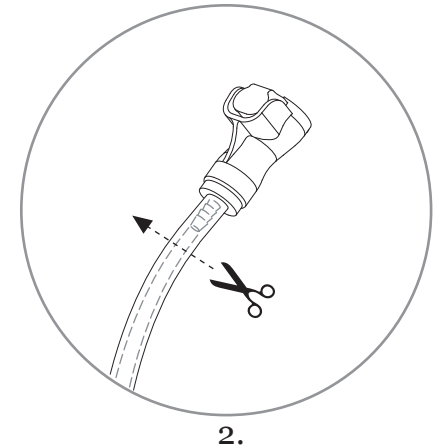


ISSUE

My Quick Connect Coupler is damaged or defective.

If your Quick Connect Coupler has become damaged or is defective the following steps will guide you through replacing it. Always wait to replace a Quick Connect Coupler until your Argon Gas Cylinder is completely empty. The replacement process will allow all gas to escape.

1. Remove Quick Connect Coupler from Tap Head by pressing in the metal button and pulling away from Tap Head.
2. Using a pair of scissors cut the Quick Connect Coupler off the end of the tube. The cut should be approximately 3/4" from the end of the tube and should be clean and square.
3. Send damaged or defective Quick Connect Coupler back to Wine Saver PRO for evaluation.
4. Firmly press barbed fitting of new Quick Connect Coupler into cut tubing end. Be sure barbed fitting is fully inserted inside tube.

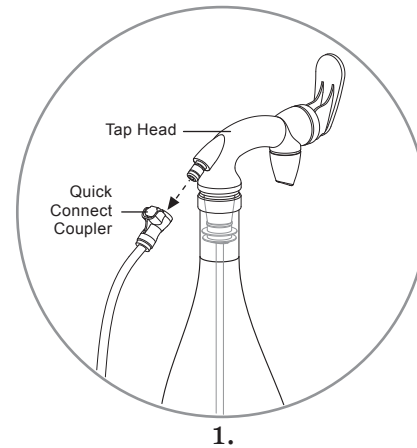

After replacement, please send Quick Connect Coupler back to Wine Saver PRO® for evaluation. Please contact a customer service representative for return information.